



Flatix 14

Description:

Introducing the Square Slim Flat Panel Light, a versatile lighting solution for commercial spaces. Available in 1X4, 2X2, and 2X4 sizes, it seamlessly integrates with T-bar ceiling tiles and offers a surface mount kit for various ceiling structures. With 3 watts tunable and CCT changeable features, it caters to different applications, providing customizable lighting. Easy installation adds to its appeal, making it an efficient choice for modern commercial environments. Elevate your space with the Square Slim Flat Panel Light – a stylish, adaptable, and energy-efficient lighting solution.

Model : PLLS3511143CJL



Optical:

Lumen Output:	125 LM/W
Lumens:	3125-3750-4375LM
LED Type:	SMD 2835
CRI:	≥80

Electrical:


Rated Power:	25W / 30W /35W
CCT Tunable Series:	3500K /4000K / 5000K
Input voltage:	120-347V
Power factor:	>0.9

Life:

Lifespan:	50,000h
Warranty:	2 Years

General:

Dimmable:	0-10V
IP:	IP40
Operating temperature:	-20°C to+50°C
Finish color Availability:	White
Certification:	ETL, FCC, DLC

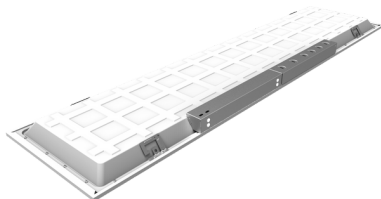

Model No.	Size (inch)	Input Voltage	Watts (W)	CCT (K)	Lpw (Lm/w)	Lumens(Lm)
PLB-XXW14-28CDD[L,M]-01	12*48	AC120-277V	25	3500	125	3125
		or	30	4000	125	3750
		AC120-347V	35	5000	125	4375



Flatix 14

Power& CCT Tunable Series



Power Tunable



CCT Tunable







Flatix 14

PHOTOMETRIC

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

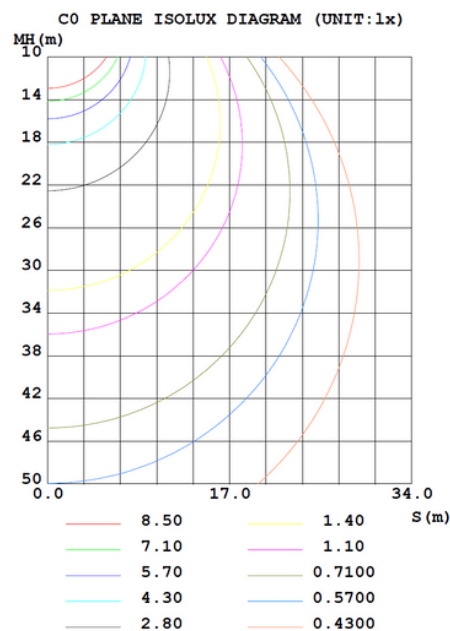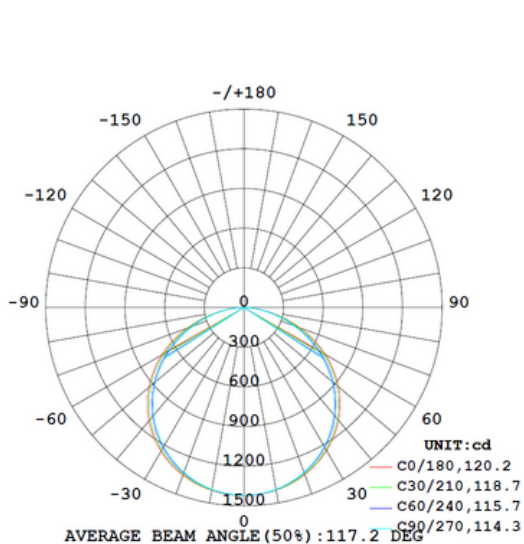

ACCESSORIES (Optional)



PROUDUCT ADVANTAGES

