



LumaFlex Gimbal 345R



Description:

This Gimbal Downlight is a 7 watt 3" lighting fixture for recess retrofit application. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations



Model: DNLG0711035CBKLP

Optical:

CCT:	5CCT Tunable
Lumen out put:	560LM
Lumen Efficacy:	80LM/W
LED Type:	COB
CRI:	≥80



Electrical:



Rated Power:	7W
Input voltage:	100-130V 60HZ
Beam angle:	36°

Life:

Lifespan:	50,000 Hours
Warranty:	2 Years

General:

Dimmable Solution:	5%-100% dimming capability
IP:	IP44
Operating temperature:	-40°C~40°C(-4°F~105°F)
Finish color Availability:	White, Black
Certification:	ETL, Energy Star, FCC
Type:	IC





LumaFlex Gimbal 345R



PHOTOMETRY

Photo Parameters:

Flux = 644.5 lm

Eff. : 95.37 lm/W

Fe = 2.064 W


Electrical parameters:

V = 120.00 V



I = 0.05770 A

P = 6.759 W

PF = 0.9761

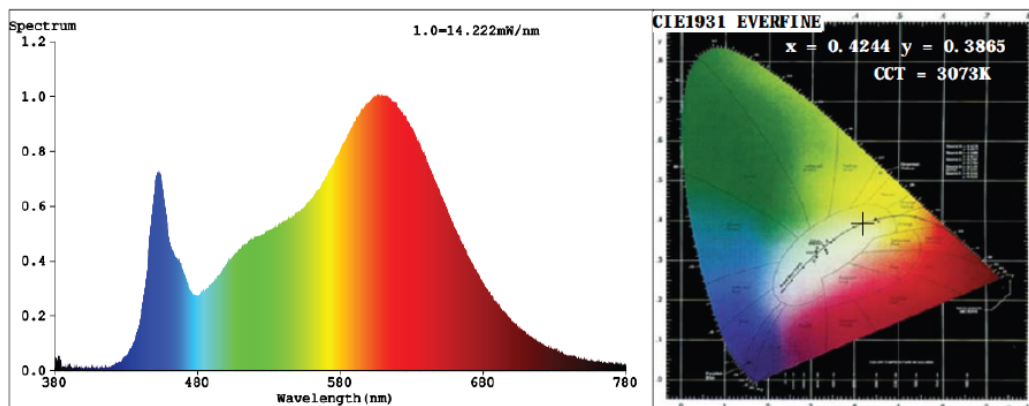

LED DRIVER

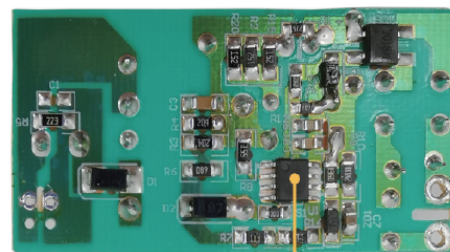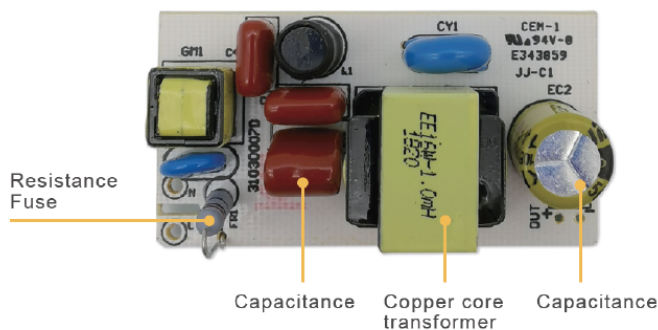

Intelligent IC constant power output

INSTALLATION



Hole-Cut size

3" Super Ø 3" (Ø77mm)

Fig.1

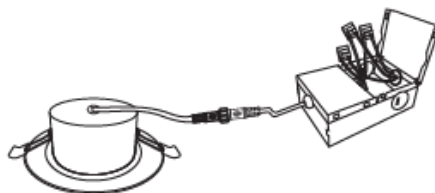


Fig.2




Fig.3

