




Clarro

Description:

An all-in-1, low-profile, linear and narrow wraparound with 9 possible color/lumen configurations standard. Comes with decorative endcaps with integrated link ability and a frosted diffuser providing widespread, uniform illumination. Ideal for many applications including corridors, kitchens, breakrooms, utility work areas and stairways. Color and Lumen Switching, Linkable Low Profile LED Wrap



Model: LRLW4811043CTO

Optical:

CCT:	3 CCT 35K/ 40K/ 50K
Lumen out put:	3680- 4600-5520LM
Lumen Efficiency:	115LM/W
LED Type:	SMD
CRI:	>80

Electrical:


Rated Power:	32/40/48W
Input voltage:	120-347V
Power factor:	>0.9
Beam Angle:	120°

Life:

Lifespan:	50,000 hours
Warranty:	2 Years

General:


Dimmable Solution:	0-10V
Applications:	Offices /Hallways /Multipurpose Rooms



Length: 620/1210(24.4"/47.6")

Width: 134.9(5.3")

Depth: 54.4(2.1")

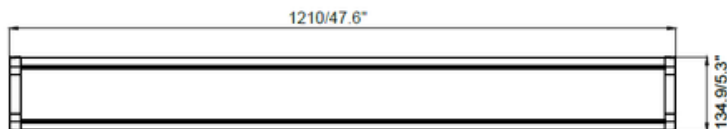




Clarro



INSTALLATION:

A-Surface Mounting:


Figure 1

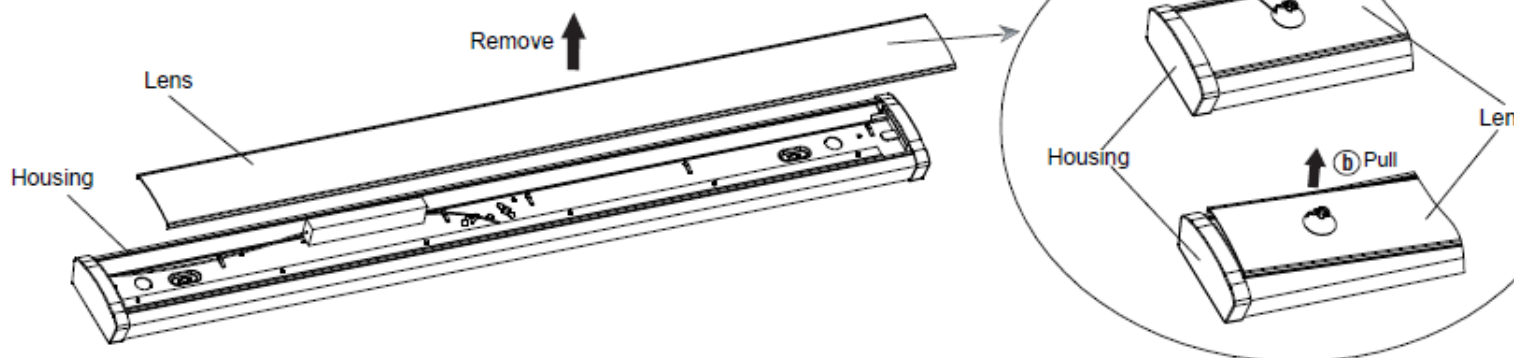

Remove lens

Figure 1A

Figure 2

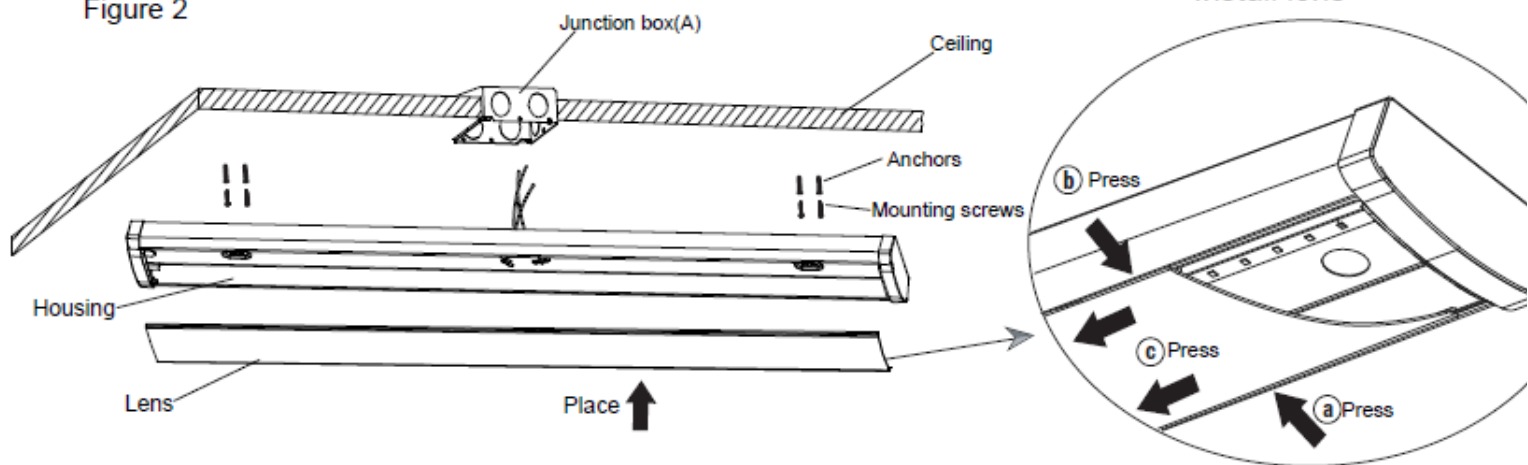

Install lens

Figure 2A




Clarro

INSTALLATION:

B-Surface Mounting:

Figure 3

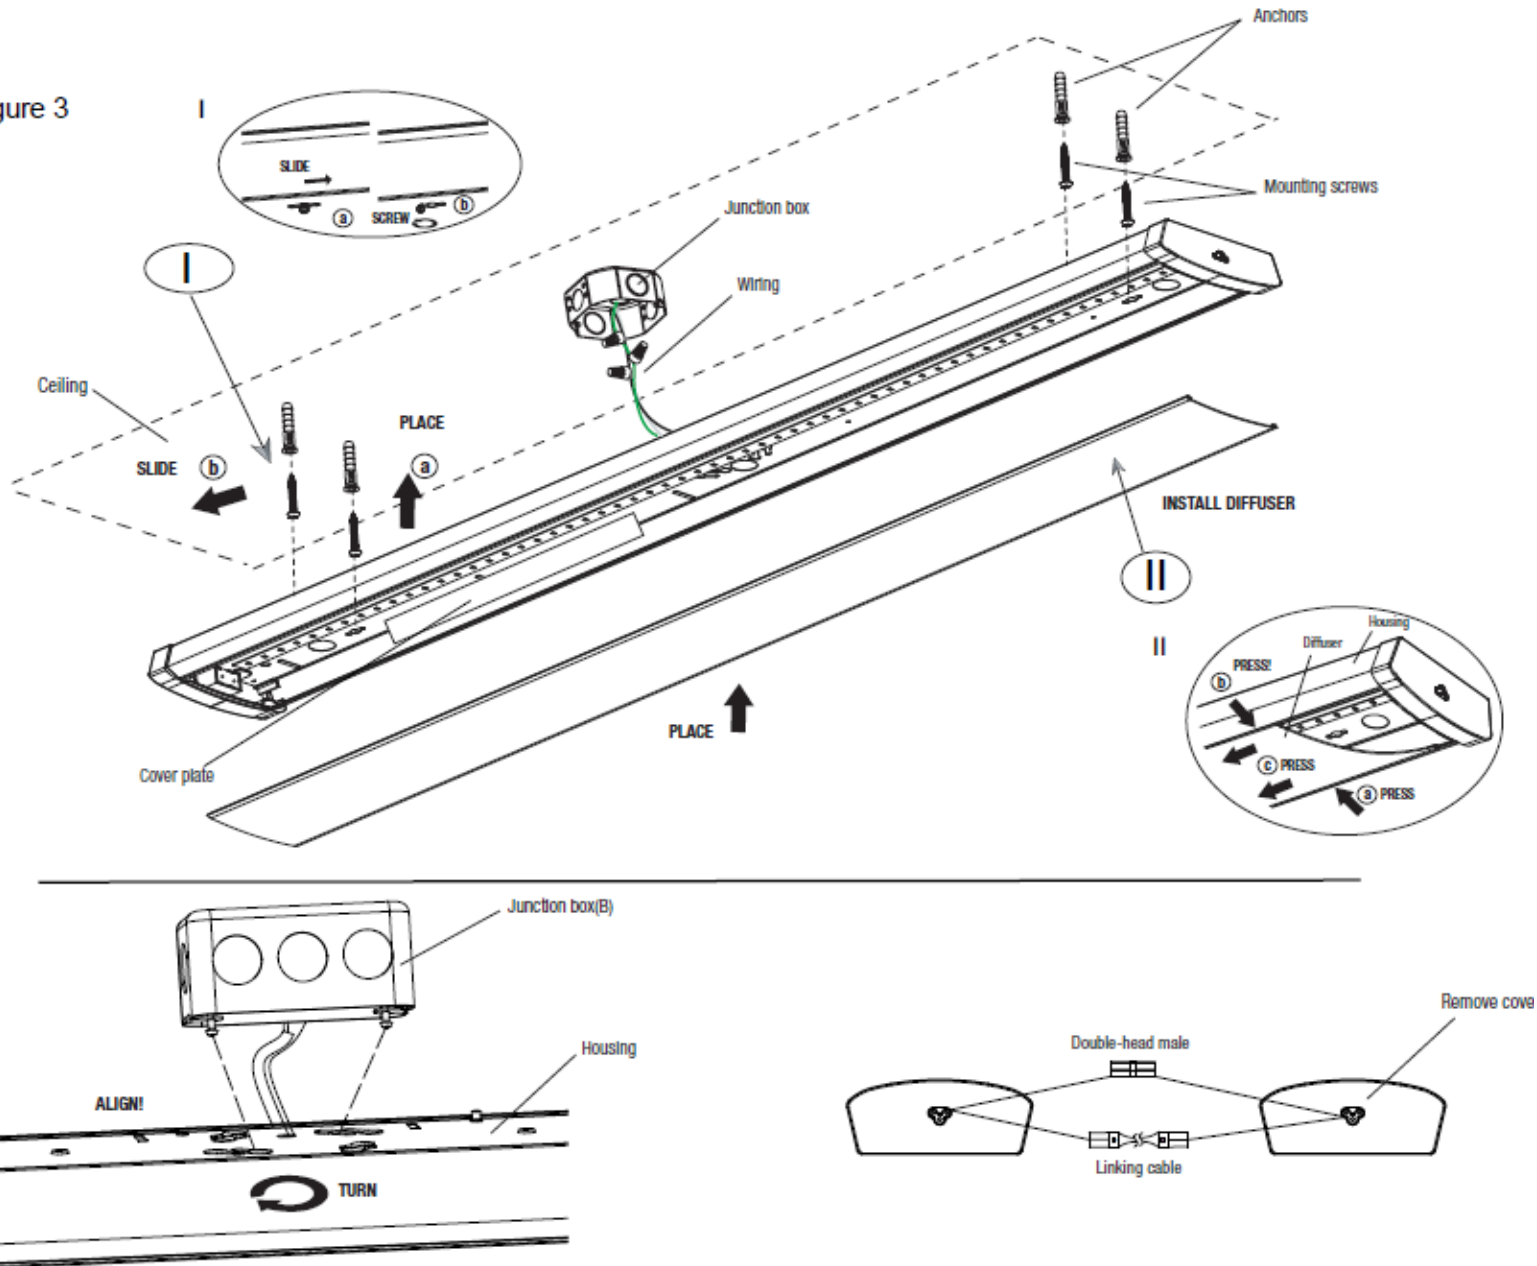



Clarro



INSTALLATION:

Suspension Mounting:

