



**LOW-GLARE LED DOWNLIGHT  
SQUAR RECESSED REGRESSED LENS 4"**



**Description:**

Durable airtight aluminum body with etched white PMMA diffuser lens for low glare 1%-100% dimming capability. This general application light fixture features a 9/12 watt LED module that maintains uniform intensity producing up to 996 lumens; with a typical CRI of 80/90  
The fixture lens provides 100° beam spread. Includes two spring loaded clips to attached to any ceiling material.

**Model: DNLSR1211045CLB**

**Optical:**

CCT:	2700K/3000/3500//4000/5000 5CCT Tunable
Lumen out put:	765LM 1020LM@4000K
Lumen Efficacy:	85LM/W
LED Type:	SMD2835
CRI:	80Ra/90Ra

**Electrical:**

Rated Power:	9W/12W
Input voltage:	AC120V/60Hz
Beam angle:	100°
Power factor/THD/PE:	>90% /<30 /70%



**Life:**

Lumen maintenance:	50,000 Hrs.
Warranty:	2 Years

**General:**

Dimmable Solution:	Triac
IP:	IP44
Operating temperature:	-20C~+40C
Storage temperature:	-40C~+85C
Finish color Availability:	White
Certification:	cETLus







**LOW-GLARE LED DOWN LIGHT  
SQUARE RECESSED REGRESSED LENS 4"**

**Product Size:**


100-125mm

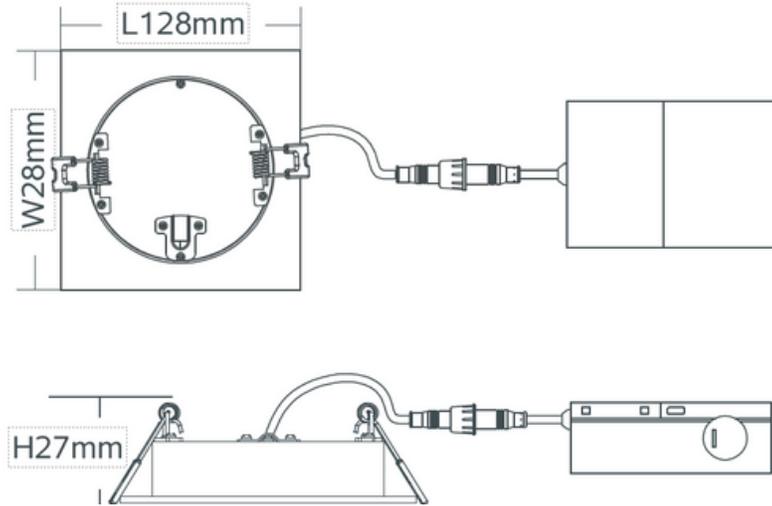

**Polar curves wide distribution:**

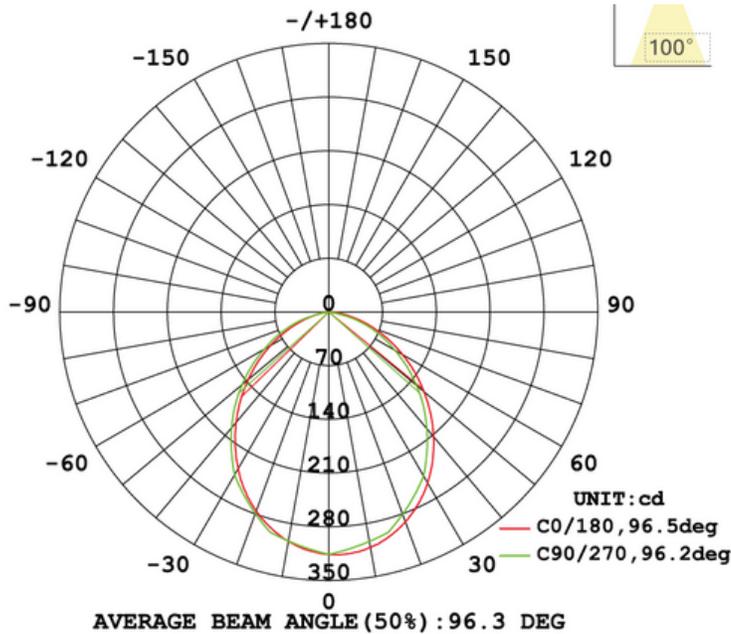

**Average and center E figure:**

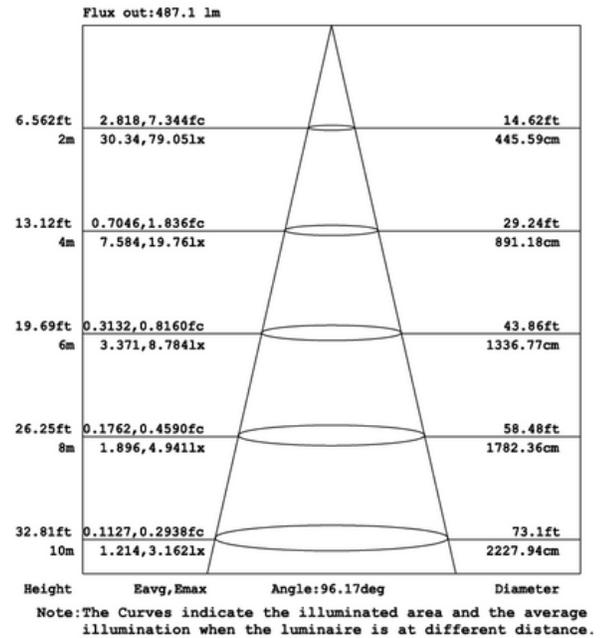



**LOW-GLARE LED DOWN LIGHT  
SQAURE RECESSED REGRESSED LENS 4"**

**Installation Process:**

Fig.1

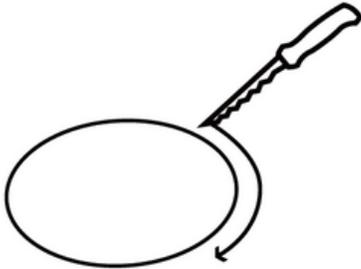


Fig.2




Fig.3

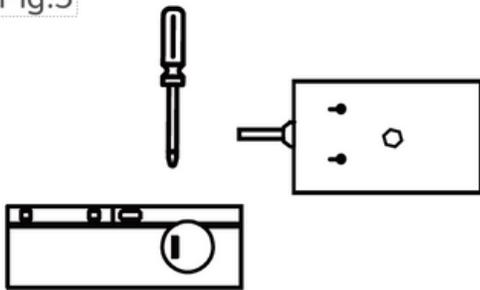


Fig.4

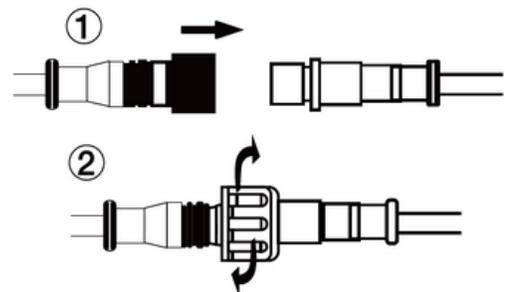


Fig.5

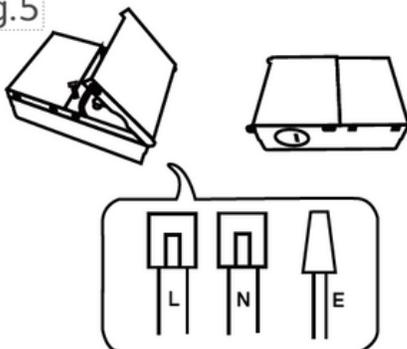


Fig.6

