



Sky Bright Slim Line

Description:

Introducing our sleek LED Ceiling Surface Mount Light, a perfect blend of style and functionality. With its slim design, this light fixture seamlessly integrates into any space, fitting neatly on a standard ceiling junction box. It offers 3CCT tunable capability, allowing you to adjust the color temperature for the desired ambiance. Additionally, it is dimmable, giving you control over the brightness. Experience the perfect lighting solution that is both stylish and efficient.



Model: SBS

Optical:

CCT: 3CCT or 5CCT
 Out put: 2000LM 12" @25W CRI 80 4000K
 Lumen Efficacy: 83 LM/W
 LED Type: SMD2835 / 56PCS
 CRI: >80

Electrical:

Rated Power: 8W,11W,14W,20W,25W
 Input voltage: AC 120V / 60Hz 120
 Beam angle: 120°
 Power factor/THD/PE: >90% / <30 / 70%

Life:

Lumen maintenance : 50,000hrs
 Warranty: 3 Years

General:

Dimmable Solution: Triac (UL)
 IP: IP20
 Finish color Availability: white

Example :SBS-11-3C-W

Model	Size/Power	CCT	Environment	Accessories
SBS	5"-8W:08 5"-11W:11 7"-14W:14 9"-20W:20 12"-25W:25	3000K/4000K/5000K : 3C 2700K/3000K/3500K/4000K/5000K : 5C	Dry:D Wet:W	Black Frame : FB Silver Frame: FS White : None



Sky Bright Slim Line

5"

7"

9"

12"



Dry Location



Size	Lumens		Watt	Dimension
5"	480@CR80	400@CR90	8	135 X17.5 mm
5"	765@CR80	650@CR90	11	135 X17.5 mm
7"	980@CR80	830@CR90	14	180X17.5 mm
9"	1400@CR80	1190@CR90	20	225 X17.5 mm
12"	2000@CR80	1700@CR90	25	300 X17.5 mm


Wet location



Size	Lumens		Watt	Dimension
5"	550lm@CR80	450@CR90	8	135X13 mm
7"	840lm@CR80	700@CR90	12	180X13 mm
9"	1280lm@CR80	1100@CR90	18	225X13 mm
12"	1680lm@CR80	1500@CR90	24	300X 13 mm



Sky Bright Slim Line

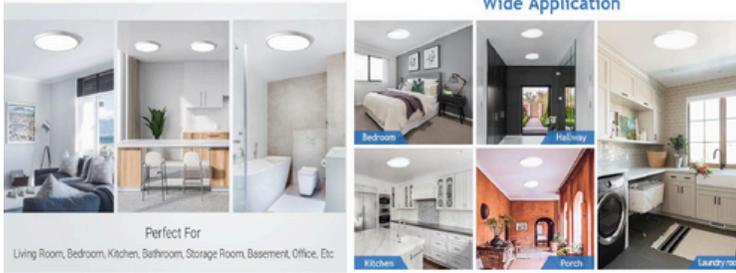

Front light color temperature
3000K 4000K and 5000K adjustable

